



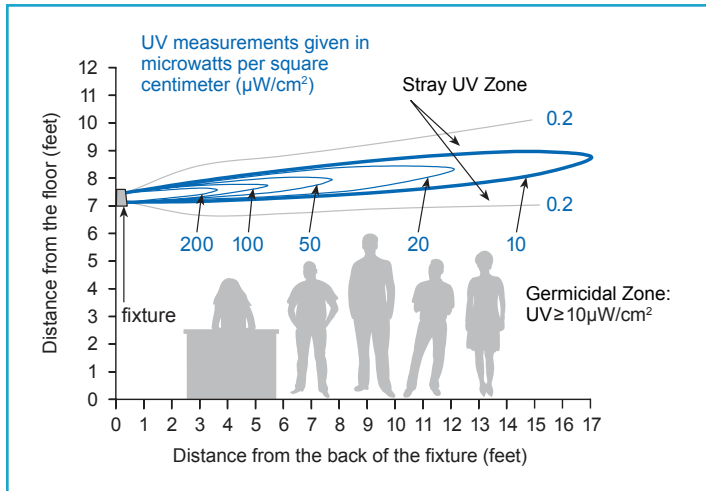


GERMICIDAL ULTRAVIOLET INDIRECT AIR DISINFECTION

All Models Feature:

- **STER-L-RAY**® Instant Start Germicidal Lamp
- **Surelite**™ Electronic Variable Ballasts
- **Steadfast**™ Lampholders
- Type 304 Stainless Steel Construction
- UV Directing Louvers
- Polished Reflector
- Pendant Mount Canopy Set (Model LIND24-EVO-2PM) or Wall Mount (Model LIND24-EVO)

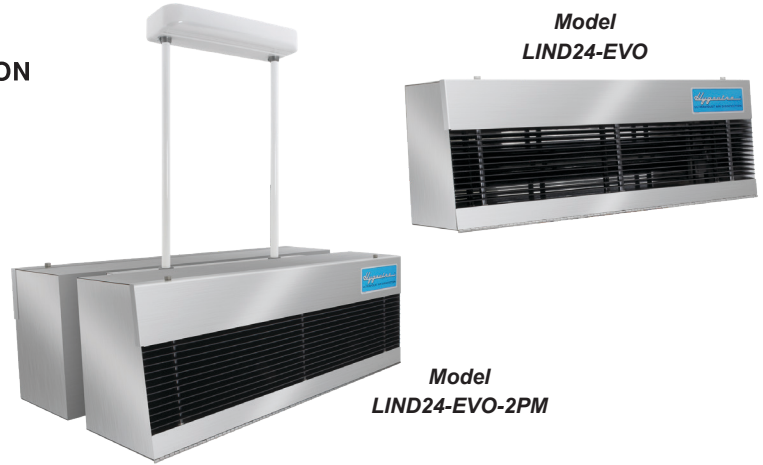

Distribution of UV rays from Hygeaire® Model LIND24-EVO wall mounted fixture

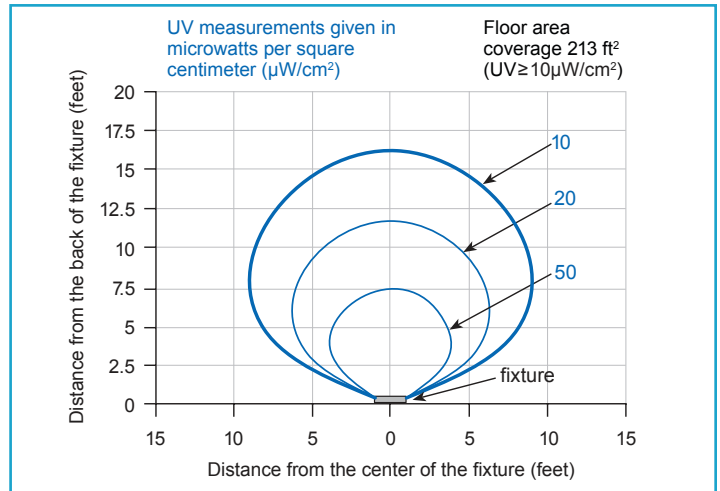

Coverage area of the Hygeaire® Model LIND24-EVO wall mounted fixture

SPECIFICATIONS

Model	Lamp (Quantity)	Power Consumption ①	Total Ultraviolet Output ②	Dimensions (Inches)			Rated Lamp Life
				Length	Width	Height	
LIND24-EVO	05-1348-R (1)	31 Watts	8.5 Watts	24"	5-11/32"	7-7/8"	10,000 Hours
LIND24-EVO-2PM	05-1348-R (2)	61.4 Watts	17 Watts	24"	10-17/32"	7-7/8"	10,000 Hours

① Wattage is Lamp Watts including ballast loss (approximate).

② Ultraviolet Output at 254 nanometers at 100 hours and 80°F (approximate).

- 120 Volts 50/60 Hz and 220–230 Volts 50/60 Hz fixtures are available—specify when ordering.
- Consult factory with other specific power requirements.
- Bottom of fixture must be installed at a minimum height of 7 feet above the floor



375 Marcus Boulevard, Hauppauge, NY 11788
 (631) 273-0500 • Fax: (631) 273-0771 • Email: Sales@AtlanticUV.com
 Shop: AtlanticUltraviolet.com • Learn More: Ultraviolet.com
 Document Number 98-1749 • April 2023 • ©2023 Atlantic Ultraviolet Corporation®

